

encore

Solutions de marquage et de traçabilité

swiftcolor™

Un Format Compact pour un Marquage MultiCouleur de Haute Qualité

Imprimante Couleur Jet d'Encre **SCL4000D**



Caractéristiques

- Haute Vitesse : 200mm / sec
- Haute Qualité d'impression : 1200 dpi
- Impression Multicouleur : (Noir, Cyan, Magenta, Jaune)
- Marquage en un seul passage
- Compact et léger

Applications Polyvalentes

Caisse d'expédition, étiquettes autocollantes, codes-barres, cosmétiques, produits de santé, emballages de médicaments, emballages alimentaires, étiquettes sur verre et bien plus encore !

Product Specifications

SCL4000D

Print Technology		Inkjet (Single pass printing)
Type of Ink		Dye based ink
Print Color		4 color (BK, C, M, Y)
Weight		52.91 lbs (24 kg) excluding head & ink cartridge
Dimensions (w x d x h)		15.19 x 22.44 x 15.51 inches (386 x 570 x 394 mm)
Print Resolution		1200x1200dpi
	Number of Print Heads	4
	Print Width	4.17 inches or less (105.9 mm or less)
Print Speed		1.96 - 7.87 inches (50 - 200 mm)/sec
Print Area	Max.Width	4.17 inches or less (105.9 mm or less)
	Length	0.11 - 15.62 inches (3.0 - 397.0 mm)
Margins	Top/Bottom	0.05 inches (1.5 mm)
	Left/Right	0.010 inch (2.7 mm) including liner
Type of the Media	Type of Paper	Exclusive roll paper (label, tag) Exclusive fanfold paper
	TOF	Label/gap, Label/mark, Tag/mark, Continuous paper (without TOF)
Media Size	Width	1-4.72 inches (25.4-120 mm)
	Length	0.23 - 15.74 inch (6.0 - 400 mm)
	Thickness	145 - 255 μ m (label/tag)
Media Roll Size		Outer diameter: Φ 7.87 inches (200 mm) and less. Core diameter: Φ 3.00 $\pm$ 0.03 inches (76.2 $\pm$ 1.0 mm)
Interface	Data Transmission	USB2.0 Hi-speed function, Giga Bit Ethernet
	Extension	RS232C 1, RS232C 2, interface for option
OS		WinXP, Vista, Win7
Power Supply		AC 100-240V, 50/60Hz
Max. Power Consumption		233 W (Printer only)
Operating Environment (Temperature/Humidity)		59°F (15°C) 10% - 86°F (30°C) 80%
Ink Cartridges	Color	BK/C/M/Y
	Capacity	240ml for each color
Option		Auto cutter


*Specifications subject to change without notice.




Simplicité de remplacement des cartouches



Large ouverture pour faciliter le chargement d'étiquettes



Module d'impression disponible pour d'autres systèmes, lignes de production etc..

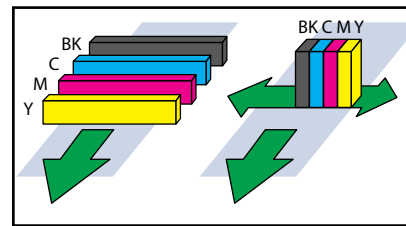

Rapidité de la SCL-4000D : Impression en un seul passage contrairement aux systèmes concurrents (impression transversale)

swiftcolor[™]
www.swiftcolor.com
info@swiftcolor.com

encore
 Solutions de marquage et de traçabilité

ZAC Epinay, 69 allée des Caillotières – 69400 Gleizé
 Tél : 04.37.551.551 – Fax 04.37.551.550
 Mail : contact@encore-marquage.fr